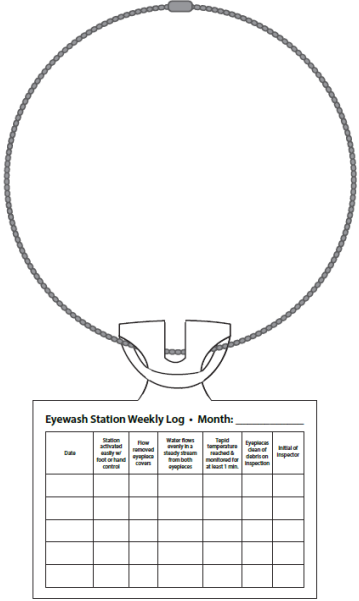


Instructions for Use: Eye Wash Temperature Check Tag


Brand Name of Product	Eye Wash Temperature Check Tag
Generic Name of Product	Eye Wash Temperature Check Tag
Product Code Number(s)	EWTC-001, EWTC-CHN
Intended Use	For testing and documenting shower and/or eyewash stations.
Range of Applications for Product	Place on the eyewash station for weekly maintenance.
Key Specifications of Product	<ul style="list-style-type: none"> • 12 Self-looping style tags for mounting on the wash station • 12 TempaChek™ LC2 • Nickel plated chain: 30 inches length

Shipping & Storage	
Shipping Conditions & Requirements	N/A
Storage Conditions	TempaChek LC2- Do not exceed temperature of 54 °C (129 °F).
Packaging Contents	Package kit: <ul style="list-style-type: none"> • 12 Tags • 12 TempaChek™ LC2 • One (1) Chain.
Shelf Life	N/A

Instructions for Using Product																																																																														
Description of Use(s)	For testing and documenting shower eyewash stations.																																																																													
Preparation for Use	<ol style="list-style-type: none"> 1. Secure the self-looping label around the chain. 2. Attach the chain of the self-looping label to the eyewash station. 																																																																													
Diagrams (drawings, pictures)	 <p style="text-align: center;"> Eyewash Station Weekly Log - Month: <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Date</th> <th>Station operation checked or not or level correct</th> <th>Flow checked eyewash nozzle</th> <th>Water flow checked for proper flow temperature</th> <th>Sign temperature is checked for at least 1 each</th> <th>Engineer check of station on inspection</th> <th>Initial of inspector</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table> </p>	Date	Station operation checked or not or level correct	Flow checked eyewash nozzle	Water flow checked for proper flow temperature	Sign temperature is checked for at least 1 each	Engineer check of station on inspection	Initial of inspector																																																																						
Date	Station operation checked or not or level correct	Flow checked eyewash nozzle	Water flow checked for proper flow temperature	Sign temperature is checked for at least 1 each	Engineer check of station on inspection	Initial of inspector																																																																								

Eyewash Station Weekly Log • Month: _____

Date	Station activated easily w/ foot or hand control	Flow removed eyepiece covers	Water flows evenly in a steady stream from both eyepieces	Tempid temperature reached & monitored for at least 1 min.	Eyepieces clean of debris on inspection	Initial of Inspector

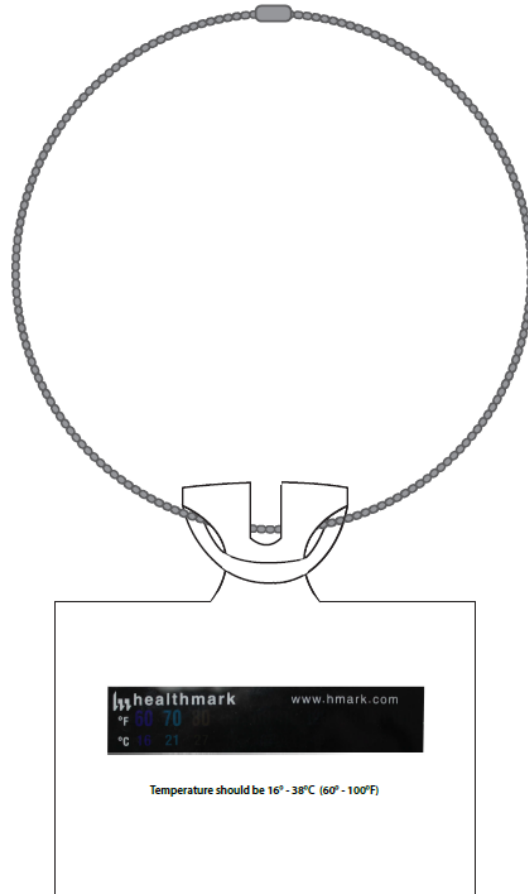

Steps for Use of Product

1. Write the month on the Eye Wash Station Weekly Log tag.
2. Date/check each log section and add inspector's initials after conducting weekly maintenance on the eyewash station.
3. Check/record temperature of the water with a TempaChek™-LC2 to ensure water is between 60- to 100 °F (15- to 37 °C).
4. Check the eyewash station (with hand/foot control) activity for water flows with:
 - a. Eyepiece caps removed.
 - b. Steady stream (evenly) from both eyepieces.
5. Check temperature is within recommended range for one minute.
6. Ensure eyepieces are clean of debris during inspection.
7. Record results on the Eye Wash Station Weekly Log tag.
8. Change (monthly) the Eye Wash Temperature Check Tag.

NOTE: Consult the eyewash station's instructions for use (IFU) from the manufacturer, including steps for checking functionality.

Interpretation of Test Results	N/A
Contraindications of Test Results	N/A
Documentation	N/A
Special Warnings and Cautions	N/A
Disposal	Dispose of in accordance with facility policy.

Reprocessing Instructions	
Point of Use	N/A
Preparation for Decontamination	N/A
Disassembly Instructions	N/A
Cleaning – Manual	N/A
Cleaning – Automated	N/A
Disinfection	N/A
Drying	N/A
Maintenance, Inspection, and Testing	N/A
Reassembly Instructions	N/A
Packaging	N/A
Sterilization	N/A
Storage	TempaChek LC2- Do not exceed temperature of 54 °C (129 °F).
Additional Information	N/A
Related Healthmark Products	N/A
Other Product Support Documents	Labeling Brochure, Labeling Price List
Reference Documents	N/A
Customer Service Contact	Healthmark Industries Company, Inc. 18600 Malyn Blvd. Fraser, MI 48026 1-586-774-7600 healthmark@hmark.com hmark.com